


LINEWRAPTM BALE WRAPPER








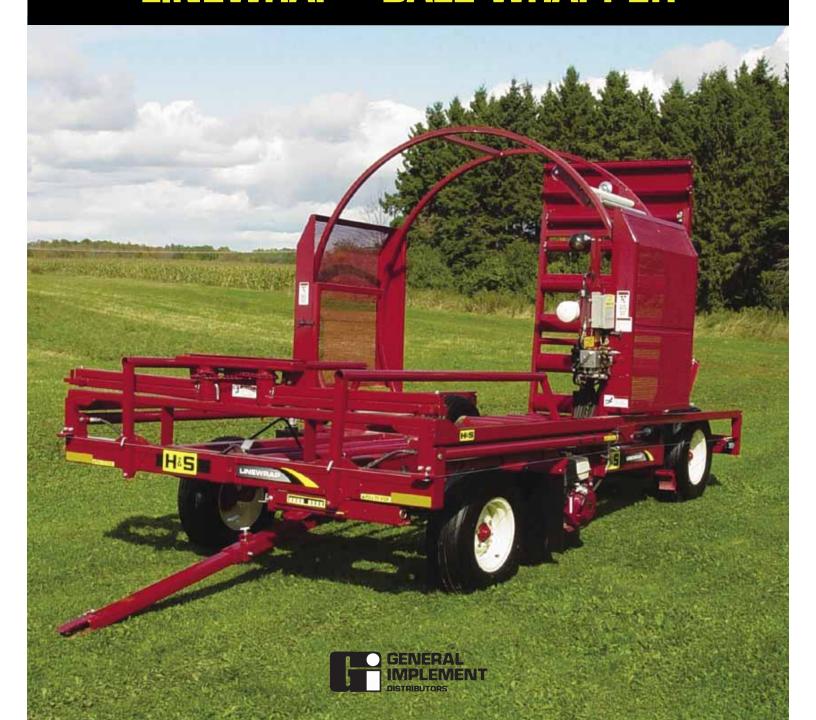

Hoop Start/Stop Switches

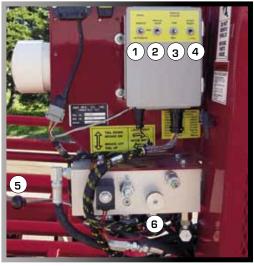

The Linewrap controls are conveniently located.

- 1. Automatic/manual operation
- 2. Manual hoop revolution
- 3. Bale pusher movement
- 4. Start/reset switch
- 5. Tailgate/brake lock
- 6. Hoop speed control for wrap

IMPLEMENT





The Linewrap's independent power source is a 13 horse power gas engine with electric start. An 18 amp alternator powers the hydraulic system which controls all machine functions. The self contained hydraulic system utilizes a large capacity oil reservoir for cooler operation.

afansioners



The Linewrap's two 30" pretensioners have a 65% stretch that allows for a tightly wrapped bale. **GENERAL**



The riser kit that allows square bales to be wrapped crosswise is standard equipment.



The open design of the 7' bale platform allows debris to fall through. The length of travel of the push bar is controlled with adjustable limit switches to reduce cycle time.

When wrapping is finished, the bale-push is extended out manually to push the bales further down the bale ramp and complete the process.



The shutoff valve must be closed after the brakes are hydraulically set against the tires.

This prevents the wrapper from rolling ahead too easily when wrapping so proper pressure is kept between bales.



The tailgate has a transport bar to lock the tailgate and a hydraulic shutoff valve that must be closed for transport.



The telescoping transport pole is pinned to the manual steering assembly when wrapping to keep the Linewrap in a straight line or to steer around obstacles.





The H&S Linewrap™ maximizes baleage yield, requires less effort and time than conventional wrapping methods, and with only the diameter of the bale wrapped, reduces wrap cost.





LINEWRAP™ Specifications

POWER	13 H.P. ELEC. START	
HYDRAULICS	15 GAL. SELF-CONTAINED RESERVOIR	
CONTROLS	AUTOMATIC OR MANUAL	
SHIPPING LENGTH	16' 10"	
WIDTH	TH 8' 10"	
HEIGHT	9' 4"	

WEIGHT	4,300 LBS.
LENGTH W/TAILGATE I	22 ' 9"
TIRES	(4) 11L-15
FILM TENSIONER	(2) 30" X 65%
BALE CAPACITY: ROU SQU SQU	ARE 6' 6" LENGTHWISE

Options



An optional electric over hydraulic steering assembly is controlled by the loading operator with a remote control (B).





The control box (C) and remote control (B) can be ordered with your choice of either of the following options:

- Bale wrapping start and stop or
- Bale wrapping start/stop and steering of the Linewrap



Optional Light Kit

The optional light kit is a nice feature for evening and night wrapping in cooler conditions.



The optional Riser Shelf & 3rd Spear is needed to wrap up to 6½ long square bales lengthwise.





	LW1100 <i>Linewrap</i> Bale Wrapper	
BASE UNIT	 Wraps Up to a 6' Round Bale & 5' Square Bales Crosquare Bales Lengthwise HONDA iGX390 Engine w/Electric Start Self-Contained Hydraulic System w/Reservoir & In- (2) 30" 65% Stretch Pre-Tensioners Automatic & Manual Controls Remote Start & Steer Push-Off System 11L x 15 Tires/Rims LED Work Lights Emergency Stop Square Bale Riser Kit 	·
Item #	Description	List Price
LW1100	In-Line Bale Wrapper	\$54,829

OPTIONS (<u>NOT</u> Required)		
BWO3	Square Bale Riser Shelf (Dealer Install)	\$1,291
LWOLIGHT	Highway Lighting Kit (Dealer Install)	\$717

Prior Year Optional Equipment - (Dealer Install)		
LWORSS	Remote Start & Steer Kit (2020 & prior year models, Serial 021LW11118 — Dealer Install)	\$2,565

