

HI-CAPACITY BI-FOLD WHEEL RAKES


H&S

HI-CAPACITY BI-FOLD RAKES




**GENERAL
IMPLEMENT**
DISTRIBUTORS

HI-CAPACITY BI-FOLD WHEEL RAKES

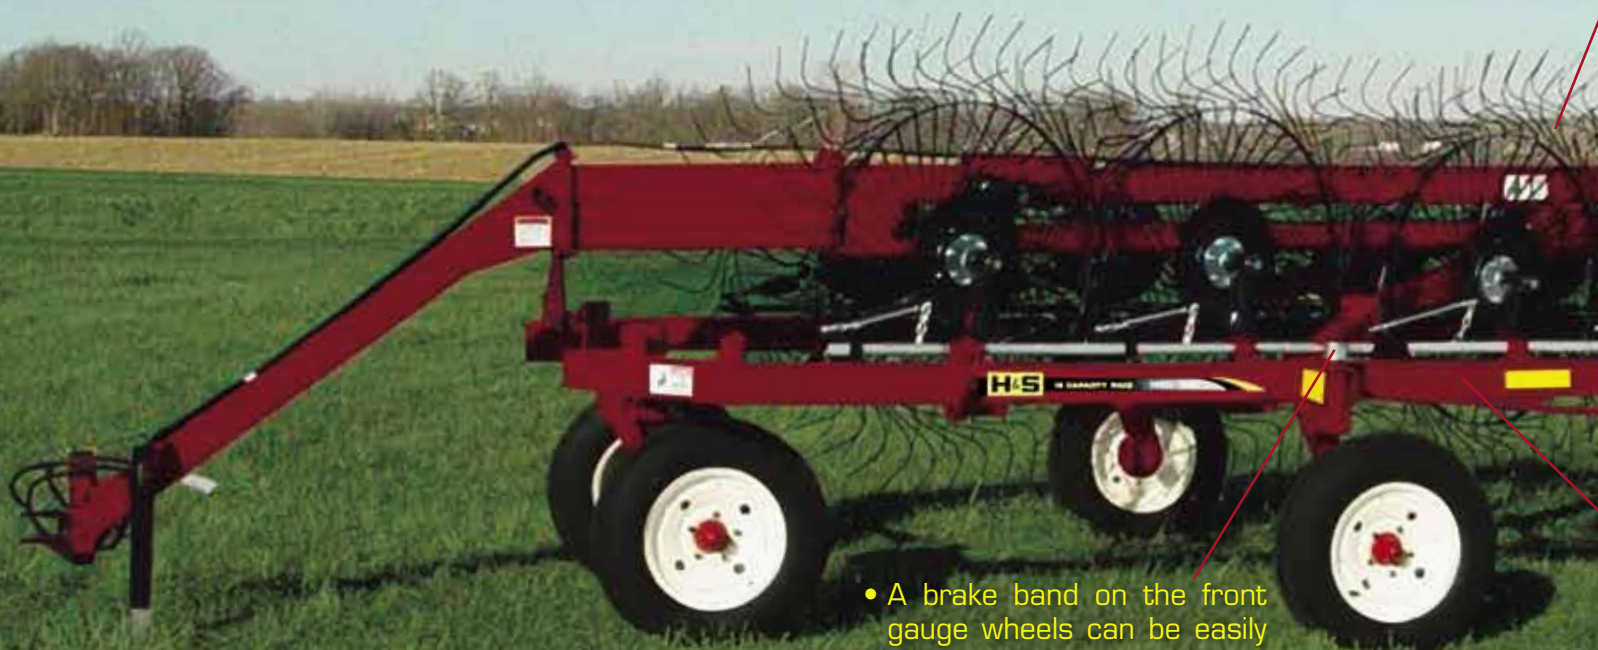

- A brake band on the front gauge wheels can be easily adjusted to field conditions.

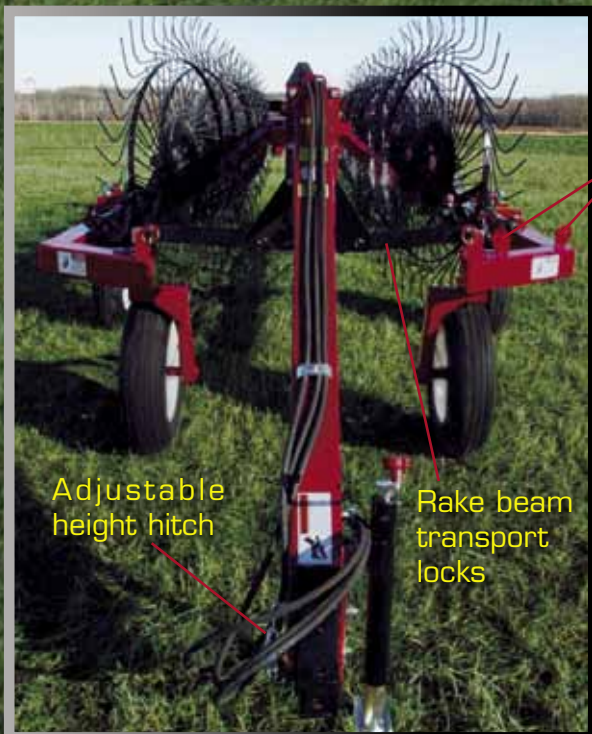

Adjustable height hitch

Rake beam transport locks

- Storage for transport locks

- Independent rake wheel suspension allows the rake wheels to follow the contour of the ground and low maintenance "Bee Hive" style springs support the large 60" rake wheels.

- A large diameter rake wheel hub is used for added strength to the rake wheel dish.



- The rake arms feature 2" on each end of the arm for smooth operation and less wear on the rakes with bushings.

- The standard wrap-a-round gauge wheels give added support to the rake beams.

HI-CAPACITY BI-FOLD WHEEL RAKES

- Large 60" diameter rake wheels turn slower for less wear and deliver more capacity.

- The windrow width adjustment is done with a hand crank and adjusts windrows from 38" to 58" in width.

- Independent articulated rake beams have the flexibility to flex 3' up or 3' down.

- Limited oscillating offset tandem transport wheels assure a smooth, level ride, even over irrigation tracks.



- Setting the spring loaded stop allows you to set pre-determined raking widths up to 28' on the 1460 and 32' on the 1660. Raking widths can be hydraulically adjusted in any position up to the pre-determined raking width.



ball bearings
for long life,
less wear than



- The adjustment for the ground pressure on the rake wheels allows the operator to fine tune the 1460 and 1660 wheel rakes to fit varying conditions.




- By removing two pins, you have the capability to rake with only the right side of the rake.



HI-CAPACITY BI-FOLD WHEEL RAKES

BI-FOLD RAKES SPECIFICATIONS

1460	
WHEEL DIAMETER	60"
TEETH PER WHEEL	40
TOOTH DIAMETER	7.5MM
TRANSPORT WIDTH	8'8"
TRANSPORT LENGTH	27'3"
WINDROW WIDTH ADJUSTMENT	38" - 58"
RAKING WIDTH	HYDRAULICALLY SET UP TO 28'
RAKING WHEEL HUBS	BALL BEARINGS
WING FLEX	3' UP OR DOWN
NUMBER OF TRANSPORT WHEELS	8
HITCH JACK	STANDARD
GAUGE WHEELS	15"
TRANSPORT WHEELS	15"
WEIGHT	N/A
DUAL CENTER KICKER WHEELS	OPTIONAL
TRIPLE CENTER KICKER WHEELS	OPTIONAL
60" RAKE WHEEL WIND BOARDS	OPTIONAL
TRANSPORT LIGHTING & POWER CORD	OPTIONAL
SAFETY CHAIN	OPTIONAL

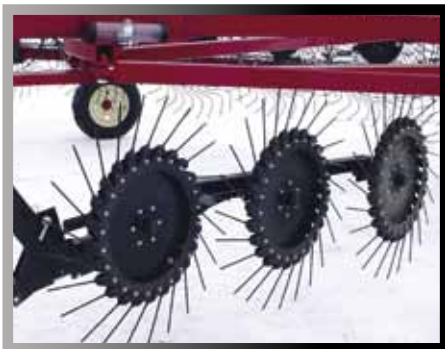

A 2 or 3 wheel center kicker assembly is optional for the Hi-Capacity rakes.

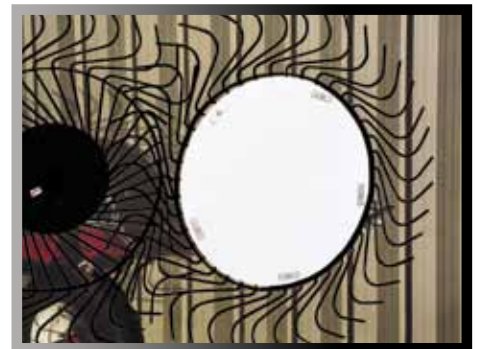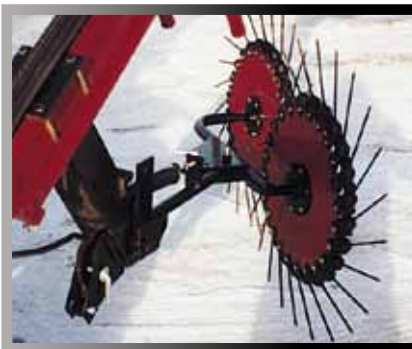

An optional rake wheel wind board is available for all H&S rakes.

HI-CAPACITY BI-FOLD WHEEL RAKES

Effective 7-23



5100 Series *Hi-CAPACITY* Wheel Rakes

- ❖ 14-Wheel Hyd. Open/Close High-Capacity V-Style Rake w/Wrap-Around Front Caster Wheels
- ❖ High & Wide Overhead Rear Frame for Flow-Through of Crop
- ❖ Hand Crank for Windrow Width Adjustment
- ❖ Rear Limited Oscillating Offset Tandem Axle
- ❖ Rake Wheels are Positioned Ahead of Rake Beams & Transport Wheels
- ❖ 3' Up or Down Rake Arm/Wing Flex

BASE UNIT ❖ 60" Diameter Rake Wheels w/Wind Panels and 7.5mm Teeth

- ❖ Heavy Bee Hive–Style Rake Wheel Suspension Springs
- ❖ Hydraulic Raise/Lower Independent Rake Wheels
- ❖ Single Point Rake Wheel Down Pressure Adjustment On Each Rake Beam
- ❖ Hydraulic Hoses w/Tips
- ❖ (8) 6.70 x 15 Tires/Rims
- ❖ Adjustable Hitch
- ❖ Jack

Item #	Description	List Price
HC5114	14-Wheel Rake	\$37,029

OPTIONS (NOT Required)

BF602	2-Wheel Add-On Kit for converting to a 16 Wheel Rake (Dealer Install)	\$2,816
BFO2-1460	2-Wheel Center Kicker Assembly w/ Hydraulic Lift (Dealer Install)	\$3,125
BFO8	Highway Lighting Kit (Dealer Install)	\$1,187
BFOWP60	60" Rake Wheel Wind Panel Kit (1) per wheel (Dealer Install)	\$50
SC10100	10,100# Safety Chain	\$85



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.