
SICKLE-BAR MOWERS





SICKLE-BAR MOWERS



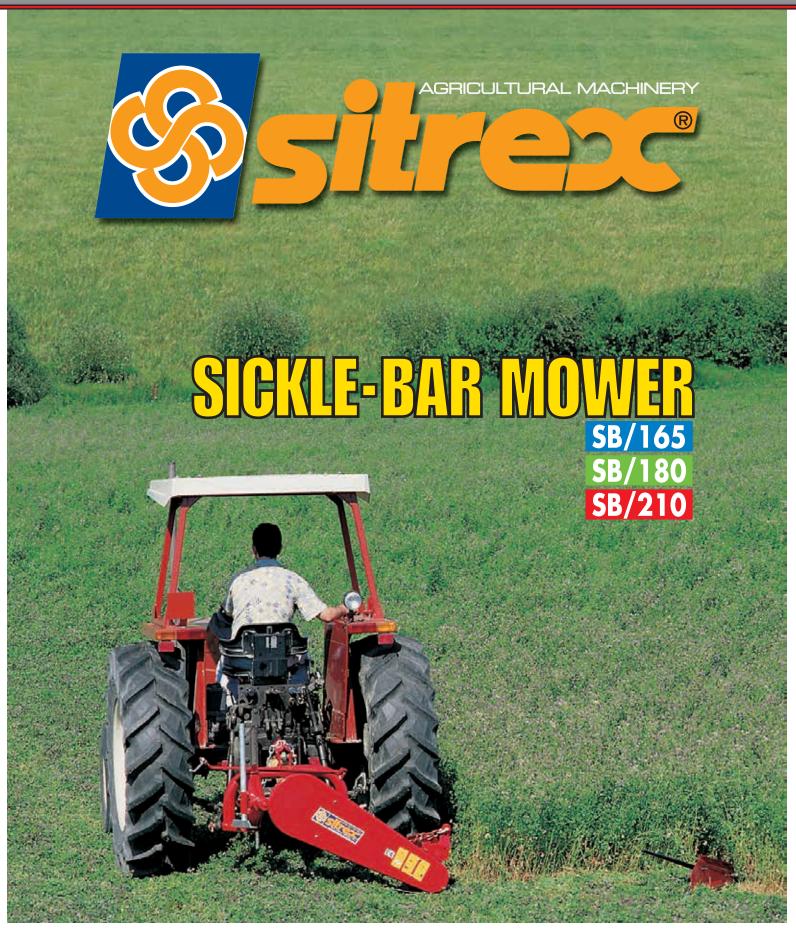

The SITREX Sickle bar Mower Series SB is a simple and reliable machine. Three working widths are available: 165 cm (5' 6'') 180 cm (6') and 210 cm (7') to satisfy the requirements of small and medium size farms. The mower is normally supplied with manual lift of the moving unit. Upon request an hydraulic lift kit can be supplied.

SPECIFICATIONS		SB/165	SB/180	SB/210
CUTTING WIDTH	CM-FEET	165 - 5' 6'	180 - 6'	210 - 7'
WORKING SPEED	KM/H - MPH	10 - 6	10 - 6	10 - 6
WORKING Inclination	FROM - TO	-60° +90°	-60° +90°	-60° +90°
POWER REQUIRED	HP - KW	15 - 11	15 - 11	15 - 11
PTO SPEED	RPM	540	540	540
WEIGHT	KG - LBS	220 - 485	230 - 505	240 - 530

TOTO



Chain Adjustement: Adjust the chain to relieve the load on the inner sole of the bar, which should not exceed: 30-50 kgs.



Safety release in case of shock with automatic re-hooking.

> Fingerbar mower with mobile sections



SICKLE-BAR MOWERS

Prices Effective as of 2-23





MODEL	DESCRIPTION	CUT WIDTH	WEIGHT	LIST PRICE
SB/165	5'6" Sickle Bar Mower, Less Hyd. Kit	5'6"	485#	\$8,080
SB/180	6' Sickle Bar Mower, Less Hyd. Kit	6'	505#	\$8,080
SB/210	7' Sickle Bar Mower, Less Hyd. Kit	7'	530#	\$8,330
SB-HYD-KIT	Hydraulic Lift Kit		75#	\$810



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.