

# Pulvi-Mulcher

ML Models - 12'6", 13'10", 15'2" & 18'9"



Model MCL-2253 Shown with Standard Equipment

The ML Series Pulvi-Mulcher features a larger frame and 20" ductile iron roller wheels. The larger diameter rollers firm and level the seedbed to ensure uniform seed germination and improve planter operation. Working widths of the ML Series fit into mid-size operations. Choice of wheels and cultivator teeth allow the ML Pulvi-Mulcher to be custom configured to meet the needs of the producer.

## STANDARD MACHINE SPECIFICATIONS

|                                             |                                       |                                 |
|---------------------------------------------|---------------------------------------|---------------------------------|
| Transport Height - 3'8"                     | 4" Roller Axles                       | Dual Transport Wheels           |
| Transport Length - 19'10"                   | Nominal Teeth Spacing - 6"            | (4) 9.5L x 15-8 Ply Tires       |
| 20" Notched Ductile Iron Wheels             | Maximum Tooth Depth of Operation - 6" | LED Warning Lights & SMV Emblem |
| 20" Crowfoot Ductile Iron Wheels            | Independent Hydraulic Tooth Control   | Safety Chain Kit                |
| Rear Scrapers - Standard on Notched Rollers | S-Tine Models: 1 3/8" Points Standard | Powder Coat Paint               |

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 12 Hours

## PRICING INFORMATION


| Model Number                                            | Working Width | Transport Width | Front Roller Type | Rear Roller Type | Number of Teeth | Approximate Weight | Suggested List Price |
|---------------------------------------------------------|---------------|-----------------|-------------------|------------------|-----------------|--------------------|----------------------|
| CONVENTIONAL "C" TEETH                                  |               |                 |                   |                  |                 |                    |                      |
| ML-1483                                                 | 12'6"         | 13'6"           | 20" Notched       | 20" Notched      | 23              | 6,314 lbs.         | \$ 33,345.00         |
| ML-1643                                                 | 13'10"        | 14'5"           | 20" Notched       | 20" Notched      | 27              | 6,666 lbs.         | 34,800.00            |
| ML-1803                                                 | 15'2"         | 15'9"           | 20" Notched       | 20" Notched      | 29              | 7,015 lbs.         | 36,154.00            |
| ML-2253                                                 | 18'9"         | 19'6"           | 20" Notched       | 20" Notched      | 35              | 8,313 lbs.         | 42,282.00            |
| MCL-1483                                                | 12'6"         | 13'6"           | 20" Crowfoot      | 20" Notched      | 23              | 6,184 lbs.         | 33,249.00            |
| MCL-1643                                                | 13'10"        | 14'5"           | 20" Crowfoot      | 20" Notched      | 27              | 6,454 lbs.         | 34,669.00            |
| MCL-1803                                                | 15'2"         | 15'9"           | 20" Crowfoot      | 20" Notched      | 29              | 6,882 lbs.         | 36,128.00            |
| MCL-2253                                                | 18'9"         | 19'6"           | 20" Crowfoot      | 20" Notched      | 35              | 8,175 lbs.         | 42,045.00            |
| MLC-1483                                                | 12'6"         | 13'6"           | 20" Notched       | 20" Crowfoot     | 23              | 6,151 lbs.         | 32,706.00            |
| MLC-1643                                                | 13'10"        | 14'5"           | 20" Notched       | 20" Crowfoot     | 27              | 6,382 lbs.         | 34,011.00            |
| MLC-1803                                                | 15'2"         | 15'9"           | 20" Notched       | 20" Crowfoot     | 29              | 6,718 lbs.         | 35,372.00            |
| MLC-2253                                                | 18'9"         | 19'6"           | 20" Notched       | 20" Crowfoot     | 35              | 7,986 lbs.         | 41,266.00            |
| MCC-1483                                                | 12'6"         | 13'6"           | 20" Crowfoot      | 20" Crowfoot     | 23              | 6,078 lbs.         | 32,756.00            |
| MCC-1643                                                | 13'10"        | 14'5"           | 20" Crowfoot      | 20" Crowfoot     | 27              | 6,215 lbs.         | 33,896.00            |
| MCC-1803                                                | 15'2"         | 15'9"           | 20" Crowfoot      | 20" Crowfoot     | 29              | 6,586 lbs.         | 35,346.00            |
| MCC-2253                                                | 18'9"         | 19'6"           | 20" Crowfoot      | 20" Crowfoot     | 35              | 7,879 lbs.         | 41,059.00            |
| 12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS |               |                 |                   |                  |                 |                    |                      |
| MLS-1483                                                | 12'6"         | 13'6"           | 20" Notched       | 20" Notched      | 23              | 6,255 lbs.         | 33,478.00            |
| MLS-1643                                                | 13'10"        | 14'5"           | 20" Notched       | 20" Notched      | 27              | 6,545 lbs.         | 34,929.00            |
| MLS-1803                                                | 15'2"         | 15'9"           | 20" Notched       | 20" Notched      | 29              | 6,737 lbs.         | 36,286.00            |
| MLS-2253                                                | 18'9"         | 19'6"           | 20" Notched       | 20" Notched      | 35              | 8,223 lbs.         | 42,413.00            |
| MCLS-1483                                               | 12'6"         | 13'6"           | 20" Crowfoot      | 20" Notched      | 23              | 6,126 lbs.         | 33,383.00            |
| MCLS-1643                                               | 13'10"        | 14'5"           | 20" Crowfoot      | 20" Notched      | 27              | 6,421 lbs.         | 34,802.00            |
| MCLS-1803                                               | 15'2"         | 15'9"           | 20" Crowfoot      | 20" Notched      | 29              | 6,605 lbs.         | 36,259.00            |
| MCLS-2253                                               | 18'9"         | 19'6"           | 20" Crowfoot      | 20" Notched      | 35              | 8,086 lbs.         | 42,179.00            |
| MLCS-1483                                               | 12'6"         | 13'6"           | 20" Notched       | 20" Crowfoot     | 23              | 6,020 lbs.         | 32,839.00            |
| MLCS-1643                                               | 13'10"        | 14'5"           | 20" Notched       | 20" Crowfoot     | 27              | 6,304 lbs.         | 34,142.00            |
| MLCS-1803                                               | 15'2"         | 15'9"           | 20" Notched       | 20" Crowfoot     | 29              | 6,441 lbs.         | 35,502.00            |
| MLCS-2253                                               | 18'9"         | 19'6"           | 20" Notched       | 20" Crowfoot     | 35              | 7,896 lbs.         | 41,397.00            |
| MCCS-1483                                               | 12'6"         | 13'6"           | 20" Crowfoot      | 20" Crowfoot     | 23              | 5,890 lbs.         | 32,887.00            |
| MCCS-1643                                               | 13'10"        | 14'5"           | 20" Crowfoot      | 20" Crowfoot     | 27              | 6,137 lbs.         | 34,028.00            |
| MCCS-1803                                               | 15'2"         | 15'9"           | 20" Crowfoot      | 20" Crowfoot     | 29              | 6,310 lbs.         | 35,480.00            |
| MCCS-2253                                               | 18'9"         | 19'6"           | 20" Crowfoot      | 20" Crowfoot     | 35              | 7,789 lbs.         | 41,192.00            |

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# Pulvi-Mulcher

WL Models - 21'8" & 25'

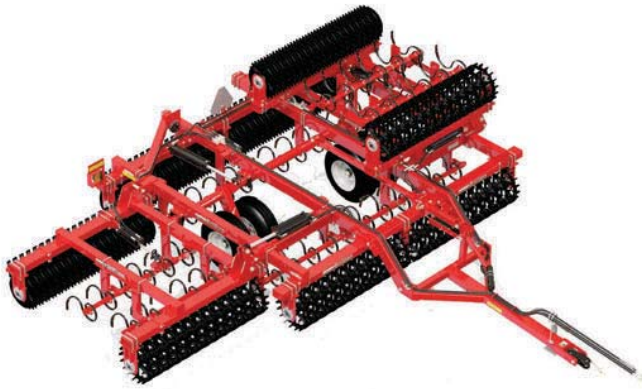

Model WCLS-3003 Shown with Standard Equipment

The WL Series of Pulvi-Mulchers offers larger model sizes that can cover more acres more efficiently. These models are flat folding units for a very manageable transport width and height. Choice of Notched or Crowfoot Ductile Iron wheels and the choice of s-tines or c-tines allow the WL Series to be customized to meet the needs of any operation.

## STANDARD MACHINE SPECIFICATIONS

|                                             |                                       |                                       |
|---------------------------------------------|---------------------------------------|---------------------------------------|
| Transport Height - 6'2"                     | 4" Roller Axles                       | S-Tine Models: 1 3/8" Points Standard |
| Transport Length - 19'10"                   | Nominal Teeth Spacing - 6"            | Dual Transport Wheels                 |
| 20" Notched Ductile Iron Wheels             | Maximum Tooth Depth of Operation - 6" | (4) 11L x 15-12 Ply Tires             |
| 20" Crowfoot Ductile Iron Wheels            | Independent Hydraulic Tooth Control   | LED Warning Lights & SMV Emblem       |
| Rear Scrapers - Standard on Notched Rollers | Cylinders and Hoses                   | Safety Chain Kit                      |
| Powder Coat Paint                           |                                       |                                       |

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 30 Hours

## PRICING INFORMATION

| Model Number                                            | Working Width | Transport Width | Front Roller Type | Rear Roller Type | Number of Teeth | Approximate Weight | Suggested List Price |
|---------------------------------------------------------|---------------|-----------------|-------------------|------------------|-----------------|--------------------|----------------------|
| CONVENTIONAL "C" TEETH                                  |               |                 |                   |                  |                 |                    |                      |
| WL-2603                                                 | 21'8"         | 13'11"          | 20" Notched       | 20" Notched      | 41              | 10,760 lbs.        | \$ 62,017.00         |
| WL-3003                                                 | 25'0"         | 13'11"          | 20" Notched       | 20" Notched      | 47              | 11,585 lbs.        | 65,437.00            |
| WLC-2603                                                | 21'8"         | 13'11"          | 20" Notched       | 20" Crowfoot     | 41              | 10,406 lbs.        | 60,866.00            |
| WLC-3003                                                | 25'0"         | 13'11"          | 20" Notched       | 20" Crowfoot     | 47              | 11,462 lbs.        | 64,153.00            |
| WCL-2603                                                | 21'8"         | 13'11"          | 20" Crowfoot      | 20" Notched      | 41              | 10,605 lbs.        | 61,819.00            |
| WCL-3003                                                | 25'0"         | 13'11"          | 20" Crowfoot      | 20" Notched      | 47              | 11,235 lbs.        | 65,262.00            |
| WCC-2603                                                | 21'8"         | 13'11"          | 20" Crowfoot      | 20" Crowfoot     | 41              | 10,251 lbs.        | 60,666.00            |
| WCC-3003                                                | 25'0"         | 13'11"          | 20" Crowfoot      | 20" Crowfoot     | 47              | 11,112 lbs.        | 64,068.00            |
| 12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS |               |                 |                   |                  |                 |                    |                      |
| WLS-2603                                                | 21'8"         | 13'11"          | 20" Notched       | 20" Notched      | 41              | 10,684 lbs.        | 62,142.00            |
| WLS-3003                                                | 25'0"         | 13'11"          | 20" Notched       | 20" Notched      | 47              | 11,499 lbs.        | 65,978.00            |
| WLCS-2603                                               | 21'8"         | 13'11"          | 20" Notched       | 20" Crowfoot     | 41              | 10,330 lbs.        | 60,969.00            |
| WLCS-3003                                               | 25'0"         | 13'11"          | 20" Notched       | 20" Crowfoot     | 47              | 11,376 lbs.        | 64,250.00            |
| WCLS-2603                                               | 21'8"         | 13'11"          | 20" Crowfoot      | 20" Notched      | 41              | 10,530 lbs.        | 62,205.00            |
| WCLS-3003                                               | 25'0"         | 13'11"          | 20" Crowfoot      | 20" Notched      | 47              | 11,149 lbs.        | 65,542.00            |
| WCCS-2603                                               | 21'8"         | 13'11"          | 20" Crowfoot      | 20" Crowfoot     | 41              | 10,176 lbs.        | 60,972.00            |
| WCCS-3003                                               | 25'0"         | 13'11"          | 20" Crowfoot      | 20" Crowfoot     | 47              | 11,026 lbs.        | 65,323.00            |

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# Pulvi-Mulcher

## Accessories and Optional Equipment

### For ML Models

| Part Number               | Description                                               | Approximate Weight | Suggested List Price |
|---------------------------|-----------------------------------------------------------|--------------------|----------------------|
| <b>POINTS</b>             |                                                           |                    |                      |
| 2J149                     | 1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware*  | 1.0 lb.            | In Base Price        |
| 2J150                     | 2 3/4" Shovel with Hardware for S-Tines*                  | 1.0 lb.            | ADD \$ 7.00 Each     |
| <b>OPTIONAL EQUIPMENT</b> |                                                           |                    |                      |
| 1K083                     | Front Scraper Kit for 12'6" Models (For Notched Rollers)  | 108.0 lbs.         | 1,149.00             |
| 1K084                     | Front Scraper Kit for 13'10" Models (For Notched Rollers) | 118.0 lbs.         | 1,235.00             |
| 1K085                     | Front Scraper Kit for 15'2" Models (For Notched Rollers)  | 129.0 lbs.         | 1,495.00             |
| 1K974                     | Front Scraper Kit for 18'9" Models (For Notched Rollers)  | 159.0 lbs.         | 1,651.00             |
| 8J141                     | Land Leveler Kit for 12'6" Models                         | 105.0 lbs.         | 657.00               |
| 8J140                     | Land Leveler Kit for 13'10" Models                        | 127.0 lbs.         | 773.00               |
| 8J139                     | Land Leveler Kit for 15'2" Models                         | 134.0 lbs.         | 801.00               |
| 1K973                     | Land Leveler Kit for 18'9" Models                         | 169.0 lbs.         | 1,026.00             |
| 3K692                     | V-Leveler Kit for 12'6" Models                            | 196.0 lbs.         | 1,527.00             |
| 3K691                     | V-Leveler Kit for 13'10" & 15'2" Models                   | 221.0 lbs.         | 1,632.00             |
| 3K690                     | V-Leveler Kit for 18'9" Models                            | 240.0 lbs.         | 1,665.00             |
| 8J127                     | Rear Hitch                                                | 74.0 lbs.          | 488.00               |

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each. **Please Specify 2J149 or 2J150 when placing order.**

### For WL Models

| Part Number               | Description                                              | Approximate Weight | Suggested List Price |
|---------------------------|----------------------------------------------------------|--------------------|----------------------|
| <b>POINTS</b>             |                                                          |                    |                      |
| 2J149                     | 1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware* | 1.0 lb.            | In Base Price        |
| 2J150                     | 2 3/4" Shovel with Hardware for S-Tines*                 | 1.0 lb.            | ADD \$ 7.00 Each     |
| <b>OPTIONAL EQUIPMENT</b> |                                                          |                    |                      |
| 1K086                     | Front Scraper Kit for 21'8" Models (For Notched Rollers) | 210.0 lbs.         | 2,071.00             |
| 1K087                     | Front Scraper Kit for 25' Models (For Notched Rollers)   | 236.0 lbs.         | 2,301.00             |
| 8J702                     | Land Leveler Kit for 21'8" Models                        | 203.0 lbs.         | 1,199.00             |
| 8J703                     | Land Leveler Kit for 25' Models                          | 213.0 lbs.         | 1,329.00             |
| 177536                    | V-Leveler Kit for 21'8" Models                           | 317.0 lbs.         | 2,346.00             |
| 177537                    | V-Leveler Kit for 25' Models                             | 328.0 lbs.         | 2,402.00             |
| 8J709                     | Rear Hitch for 21'8" and 25' Models                      | 95.0 lbs.          | 487.00               |
| 9K446                     | Hydraulic Conversion Kit For Independent Wing Control    | 16.0 lbs.          | 294.00               |
| 202528                    | C-Tooth to S-Tine Conversion Kit for 21'8" Models        | 489.0 lbs.         | 5,180.00             |
| 202529                    | C-Tooth to S-Tine Conversion Kit for 25' Models          | 541.0 lbs.         | 5,674.00             |
| 202530                    | S-Tine to C-Tooth Conversion Kit for 21'8" Models        | 603.0 lbs.         | 6,059.00             |
| 202531                    | S-Tine to C-Tooth Conversion Kit for 25' Models          | 671.0 lbs.         | 6,976.00             |

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each **Please Specify 2J149 or 2J150 when placing order.**



# Pulvi-Mulcher

## WL Models - 30'



Model WL-360 Shown with Standard Equipment

With a working width of 30 feet and an operating weight in excess of 13,000 lbs., these WL Pulvi-Mulcher models provide the ultimate in high capacity seedbed preparation. These units are flat folding for a very manageable transport width and height. Choice of Notched or Crowfoot Ductile Iron wheels and choice of s-tines or c-tines allow these machines to be set up to match differing soil types.

### STANDARD MACHINE SPECIFICATIONS

|                                             |                                       |                                 |
|---------------------------------------------|---------------------------------------|---------------------------------|
| Transport Height - 6'4"                     | 4" Roller Axles                       | Dual Transport Wheels           |
| Transport Length - 19'10"                   | Nominal Teeth Spacing - 6"            | (4) 12.5L x 16-14 Ply Tires     |
| 20" Notched Ductile Iron Wheels             | Maximum Tooth Depth of Operation - 6" | LED Warning Lights & SMV Emblem |
| 20" Crowfoot Ductile Iron Wheels            | Independent Hydraulic Tooth Control   | Safety Chain Kit                |
| Rear Scrapers - Standard on Notched Rollers | S-Tine Models: 1 3/8" Points Standard | Powder Coat Paint               |

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 40 Hours

### PRICING INFORMATION

| Model Number                                            | Working Width | Transport Width | Front Roller Type | Rear Roller Type | Number of Teeth | Approximate Weight | Suggested List Price |
|---------------------------------------------------------|---------------|-----------------|-------------------|------------------|-----------------|--------------------|----------------------|
| CONVENTIONAL "C" TEETH                                  |               |                 |                   |                  |                 |                    |                      |
| WL-360                                                  | 30'           | 16'9"           | 20" Notched       | 20" Notched      | 59              | 15,453 lbs.        | \$ 80,038.00         |
| WLC-360                                                 | 30'           | 16'9"           | 20" Notched       | 20" Crowfoot     | 59              | 14,836 lbs.        | 78,609.00            |
| WCL-360                                                 | 30'           | 16'9"           | 20" Crowfoot      | 20" Notched      | 59              | 15,189 lbs.        | 80,005.00            |
| WCC-360                                                 | 30'           | 16'9"           | 20" Crowfoot      | 20" Crowfoot     | 59              | 14,572 lbs.        | 78,576.00            |
| 12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS |               |                 |                   |                  |                 |                    |                      |
| WLS-360                                                 | 30'           | 16'9"           | 20" Notched       | 20" Notched      | 59              | 15,377 lbs.        | 80,155.00            |
| WLCS-360                                                | 30'           | 16'9"           | 20" Notched       | 20" Crowfoot     | 59              | 13,961 lbs.        | 78,729.00            |
| WCLS-360                                                | 30'           | 16'9"           | 20" Crowfoot      | 20" Notched      | 59              | 14,313 lbs.        | 80,127.00            |
| WCCS-360                                                | 30'           | 16'9"           | 20" Crowfoot      | 20" Crowfoot     | 59              | 13,697 lbs.        | 78,698.00            |

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

| Part Number | Description                                              | Approximate Weight | Suggested List Price |
|-------------|----------------------------------------------------------|--------------------|----------------------|
| 2J149       | 1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware* | 1.0 lb.            | In Base Price        |
| 2J150       | 2 3/4" Shovel with Hardware for S-Tines*                 | 1.0 lb.            | ADD \$ 7.00 Each     |
| 3K028       | S-Tine Shank, Clamp & Hardware                           | 9.0 lbs.           | 67.00                |
| 9J619       | Front Scraper Kit for 30' Models (For Notched Rollers)   | 373.0 lbs.         | 2,836.00             |
| 9J614       | Land Leveler Kit for 30' Models                          | 425.0 lbs.         | 1,957.00             |
| 177563      | V-Leveler Kit for 30' Models                             | 445.0 lbs.         | 2,666.00             |
| 9J545       | Rear Hitch Kit                                           | 156.0 lbs.         | 1,041.00             |

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each **Please Specify 2J149 or 2J150 when placing order.**




**GENERAL  
IMPLEMENT**  
DISTRIBUTORS

Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# Pulvi-Mulcher

## 3620 Models - 21'

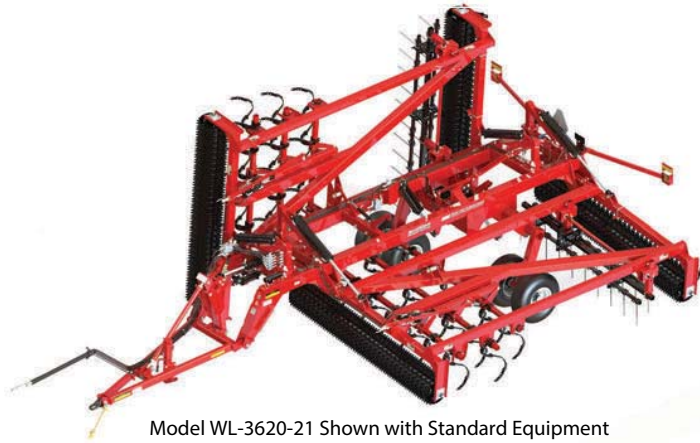

Model WL-3620-21 Shown with Standard Equipment

The 3620 Series Pulvi-Mulcher, a two-section folding unit, features taller and stronger two-piece s-tine shanks with additional clearance for improved residue flow through the machine. 8" roller axles with heavy-duty bearings improve reliability and reduce down time. The 21' model utilizes a hydraulic down pressure system for even machine weight distribution across the width of the machine. Choice of Notched, Crowfoot or Optimizer® Ductile Iron wheels allow machines to be matched to varying soil types.

### STANDARD MACHINE SPECIFICATIONS

|                                    |                                                   |                                                |
|------------------------------------|---------------------------------------------------|------------------------------------------------|
| Transport Height - 13'4"           | 3 Rows of Shanks - 18" Between Shanks             | Dual Transport Wheels                          |
| Transport Width - 12'3"            | Minimum of 24" Between Rows of Shanks             | (4) 12.5L x 15 FI Tires                        |
| Overall Machine Length - 31'3"     | Heavy-Duty Two-Piece S-Tine Shank (1 3/4" x 5/8") | Rear Scrapers - Standard on Notched Rollers    |
| 24" Notched Ductile Iron Wheels    | 2" Reversible Points                              | 2 Row Coil Tine Harrow in Front of Rear Roller |
| 8" Roller Axles                    | 25" Under Frame Clearance                         | Cat. II, III or IV Hitch                       |
| 61 mm Heavy-Duty Bearings          | Hitch Floats 15 Degrees Up, 25 Degrees Down       | LED Warning Lights & SMV Emblem                |
| Nominal Shank Spacing - 6"         | Wings Float 5 Degrees Down                        | Safety Chain Kit                               |
| Maximum Shank Operating Depth - 5" | Independent Hydraulic Tooth Depth Control         | Powder Coat Paint                              |

Horsepower Requirements: 10 to 14 HP per Foot

Approximate Set-Up Time: 50 Hours

### PRICING INFORMATION

| Model Number | Working Width | Transport Width | Front Roller Type | Rear Roller Type | Number of Shanks | Approximate Weight | Suggested List Price |
|--------------|---------------|-----------------|-------------------|------------------|------------------|--------------------|----------------------|
| WLB-3620-21  | 21'           | 12'3"           | 24" Notched       | 24" Notched      | 42               | 21,353 lbs.        | \$ 108,059.00        |

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

| Part Number | Description                                                    | Approximate Weight | Suggested List Price |
|-------------|----------------------------------------------------------------|--------------------|----------------------|
| 185120      | 2" Reversible Point with Hardware                              | 2.0 lbs.           | In Base Price        |
| 181331      | Two-Piece S-Tine Shank Assembly, Clamp & Hardware (Less Point) | 26.0 lbs.          | \$ 183.00            |
| 156949      | Single Lip Cat. V Hitch*                                       | 44.0 lbs.          | ADD 255.00           |
| 219116      | Front Scraper Kit for 21' Model (For 24" Notched Rollers)      | 216.0 lbs.         | 1,778.00             |
| 203736      | V-Leveler Kit for 21' Models                                   | 382.0 lbs.         | 2,369.00             |
| 203738      | Rear Hitch Kit                                                 | 477.0 lbs.         | 2,831.00             |

\* Please specify which hitch is needed when placing order. Cat. II, III or IV are included in the base price of the machine, see above for additional cost if Cat. V hitch is needed.




Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

Secondary Tillage

# Pulvi-Mulcher

## 3631 Models - 25', 30' & 36'

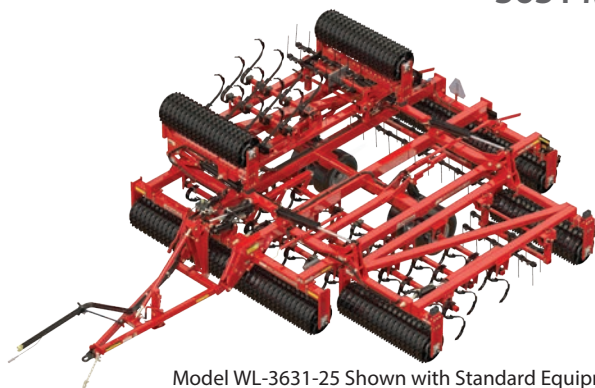

Model WL-3631-25 Shown with Standard Equipment

The 3631 Series Pulvi-Mulcher, three-section folding units available in 25', 30' and 36' working widths, feature heavy-duty s-tine shanks with additional clearance for improved residue flow through the machine. 8" roller axles with heavy-duty bearings improve reliability and reduce down time. Standard equipment includes wing hydraulic down pressure and a two-row coil tine harrow in front of the rear roller. The 3631 Series is offered with 24" Notched Ductile Iron wheels on the front and rear rollers.

### STANDARD MACHINE SPECIFICATIONS

|                                                      |                                                          |                                                |
|------------------------------------------------------|----------------------------------------------------------|------------------------------------------------|
| Transport Height - 9'6" for 25' & 30'; 13'8" for 36' | Minimum of 24" Between Rows of Shanks                    | Dual Transport Wheels                          |
| Transport Width - See Below                          | Heavy-Duty Two-Piece S-Tine Shank (1 3/4" x 5/8")        | (4) 380/55R16.5 Tires on 25' Model             |
| Overall Machine Length - 29'                         | 2" Reversible Points                                     | (4) 480/45R17 Tires on 30' Model               |
| 24" Notched Ductile Iron Wheels                      | 23" Under Frame Clearance                                | (4) 480/45R17 Tires on 36' Model               |
| 8" Roller Axles                                      | Wing Hydraulic Down Pressure                             | Rear Scrapers - Standard on Notched Rollers    |
| 61 mm Heavy-Duty Bearings                            | Single Point Depth Control                               | 2 Row Coil Tine Harrow in Front of Rear Roller |
| Nominal Shank Spacing - 6"                           | Transport Hitch Floats 25 Degrees Up and 17 Degrees Down | LED Warning Lights & SMV Emblem                |
| Maximum Shank Operating Depth - 5"                   | Wings Float 6 Degrees Down                               | Safety Chain Kit                               |
| 3 Rows of Shanks - 18" Between Shanks                | Cat. III, IV or V Hitch                                  | Powder Coat Paint                              |

Horsepower Requirements: 10 to 14 HP per Foot

Approximate Set-Up Time: 70 to 90 Hours

### PRICING INFORMATION

| Model Number | Working Width | Transport Width | Front Roller Type | Rear Roller Type | Number of Shanks | Approximate Weight | Suggested List Price |
|--------------|---------------|-----------------|-------------------|------------------|------------------|--------------------|----------------------|
| WLB-3631-25  | 25'           | 14'8"           | 24" Notched       | 24" Notched      | 49               | 25,002 lbs.        | \$ 124,111.00        |
| WLB-3631-30  | 30'           | 17'0"           | 24" Notched       | 24" Notched      | 59               | 27,870 lbs.        | 144,828.00           |
| WLB-3631-36  | 36'           | 18'10"          | 24" Notched       | 24" Notched      | 71               | 32,784 lbs.        | 171,924.00           |

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

| Part Number | Description                                                    | Approximate Weight | Suggested List Price |
|-------------|----------------------------------------------------------------|--------------------|----------------------|
| 185120      | 2" Reversible Point with Hardware                              | 2.0 lbs.           | In Base Price        |
| 181331      | Two-Piece S-Tine Shank Assembly, Clamp & Hardware (Less Point) | 26.0 lbs.          | \$ 183.00            |
| 156949      | Single Lip Cat. V Hitch*                                       | 44.0 lbs.          | ADD 255.00           |
| 214038      | Front Scraper Kit for 25' Model (For Notched Rollers)          | 265.0 lbs.         | 2,357.00             |
| 214039      | Front Scraper Kit for 30' Model (For Notched Rollers)          | 298.0 lbs.         | 2,648.00             |
| 221578      | Front Scraper Kit for 36' Model (For Notched Rollers)          | 366.0 lbs.         | 2,872.00             |
| 214021      | Land Leveler Kit for 25' Model                                 | 545.0 lbs.         | 2,701.00             |
| 214022      | Land Leveler Kit for 30' Model                                 | 581.0 lbs.         | 2,786.00             |
| 221592      | Land Leveler Kit for 36' Model                                 | 668.0 lbs.         | 3,394.00             |
| 214023      | V-Leveler Kit for 25' Model                                    | 511.0 lbs.         | 2,769.00             |
| 214024      | V-Leveler Kit for 30' Model                                    | 547.0 lbs.         | 2,888.00             |
| 221591      | V-Leveler Kit for 36' Model                                    | 678.0 lbs.         | 3,237.00             |
| 213907      | Coil Tine Harrow Kit for 25' Model                             | 2,520.0 lbs.       | 14,728.00            |
| 224174      | Coil Tine Harrow Kit for 25' Model with Hydraulic Lift         | 2,699.0 lbs.       | 19,175.00            |
| 213908      | Coil Tine Harrow Kit for 30' Model                             | 2,672.0 lbs.       | 16,128.00            |
| 224175      | Coil Tine Harrow Kit for 30' Model with Hydraulic Lift         | 2,853.0 lbs.       | 20,372.00            |
| 221599      | Coil Tine Harrow Kit for 36' Model                             | 2,839.0 lbs.       | 18,058.00            |
| 224176      | Coil Tine Harrow Kit for 36' Model with Hydraulic Lift         | 3,022.0 lbs.       | 22,624.00            |
| 214025      | Rear Hitch Kit                                                 | 346.0 lbs.         | 2,477.00             |

\* Please specify which hitch is needed when placing order. Cat. III or Cat. IV are included in the base price of the machine, see above for additional cost if Cat. V hitch is needed.

Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.