

Axis Tool Arm



FEATURES


- Retractable Counterweight Shel
- Hydraulic Tool Rotation
- Hydraulic Tool Lift
- Transport Lock



Rotary Cutter not included.

Stabilizer Arm to Cutter

Various attachment bracket are supplied with the Axis Toolbar to attach the Stabilizer Bar to the cutter. All four adaptors are included.

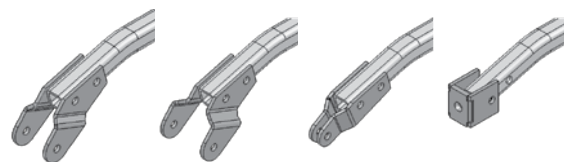

Shown in order: Rotary Cutter, Kodiak, Fork Rear Wheel Style with 180° Wheel Adjuster, Fork Rear Wheel Style with Flat Wheel Adjuster

SPECIFICATIONS

Model	AXIS4	AXIS5-6
Weight (LBS.)	751	900
Offset	60"	84"
3PH Mount	Cat. 1	Cat. 1 & 2
Minimum Tractor Weight (LBS.)	2,900	5,800
Maximum Tool Weight (LBS.)	480	800
4' Rotary Cutter (Not Included)	req. min. 30 HP	
5' Rotary Cutter (Not Included)	req. min. 60 HP	
6' Rotary Cutter (Not Included)	req. min. 80 HP	
Cutting Angle Cyl. Ext.	55°	
Cutting Angle Cyl. Ret.	90°	
Tractor Remotes Req.	2	
Protection	Shear Bolt	Shear Bolt
List Price	\$8,890.00	\$9,840.00



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.



FEATURES

- Maximum brush diameter 1
- 7 year limited warrant
- Cat. 1 3P
- Adjustable cutting height 2" – 10"
- Floating top link maintains cutting height
- Solid segmented wheels for no flat running
- 2 blade design
- Standard front and rear rubber guard
- Deck protection rim
- Fixed skid shoe

OPTIONS

- Light duty slip clutch for driveline protection
- Chain curtain
- Rubber guard



SPECIFICATIONS

Model	PRC48LD	PRC48	PRC54	PRC60	PRC66	PRC72	PRC72HD
Shipping Weight (LBS.)	320	380	430	500	560	625	635
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	48"	48"	54"	60"	66"	72"	72"
Max Brush Diameter	1"	1"	1"	1"	1"	1"	1"
Tip Speed (Ft/Min)	13100	13100	14725	12462	13708	14955	14955
Wheels	16" (Air Filled)		16" (Segmented)				
Blades	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"
Tractor HP (min)	20	20	22	30	40	50	50
PTO RPM	540	540	540	540	540	540	540
Gearbox Rating	40	40	40	60*	60*	60*	75*
Deck	12 ga	12 ga	12 ga	12 ga	12 ga	12 ga	12 ga
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Rubber Guard	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Protection (Std./Opt.)	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Slip Clutch (Std.)
List Price (Shear Pin)	PRC48LD \$2,725.00	PRC48 \$2,820.00	PRC54 \$2,865.00	PRC60 \$2,910.00	PRC66 \$3,295.00	PRC72 \$3,825.00	
List Price (Slip Clutch)	PRC48LDSC \$2,915.00	PRC48SC \$3,050.00	PRC54SC \$3,085.00	PRC60SC \$3,125.00	PRC66SC \$3,615.00	PRC72SC \$4,235.00	PRC72HD \$4,566.00

* Based on field performance



Chain Guards

Part # (Chain)	List Price
PRC48CHAIN16	\$480.00
PRC54CHAIN	\$520.00
PRC60CHAIN16	\$555.00
PRC66CHAIN16	\$635.00
PRC72CHAIN16	\$715.00

Includes both front and back chains.



Slip Clutch

Part #	Description	List Price
PRCSC	Optional Light Duty Slip Clutch	\$475.00



Rubber Guard kit

Part #	Description	List Price
RC48RB	Rubber Guard option for 48" PRC/MKRC	\$120.00
RC54RB	Rubber Guard option for 54" PRC/MKRC	\$122.00
RC60RB	Rubber Guard option for 60" PRC/MKRC	\$125.00
RC66RB	Rubber Guard option for 66" PRC/MKRC	\$127.00
RC72RB	Rubber Guard option for 72" PRC/MKRC	\$129.00

3PH Rotary Cutters - 700 Series



FEATURES

- 7" Deck Height
- Maximum brush diameter 2
- 7 year limited warrant
- Cat. 1 3P
- Adjustable cutting height 1.5" – 13"
- Floating top lin
- Solid segmented wheel
- 2 blade design with stump jumpe
- Standard front and rear rubber guard
- Deck protection rin
- Stump jumpe
- Fixed skid sho

OPTIONS

- Light duty slip clutch for driveline protectio
- Chain curtain

SPECIFICATIONS

Model	MKRC748	MKRC760	MKRC766	MKRC772	MKRC772HD	MKRC784HD
Cut Width	48"	60"	66"	72"	72"	84"
Weight (LBS.)	420	535	605	640	730	840
Hitch	Cat. 1 Quick Hitch Compatible					
Cutting Height	1.5" - 13" / 10 Positions					
Max Brush Diameter	2"					
Tip Speed (Ft/Min)	13100	12462	13708	14955	15260	17803
Wheels	16" Segmented					X2
Blades	1/2" x 3"					
Tractor HP (min)	22	30	40	50	50	60
PTO RPM	540 RPM	540 RPM	540 RPM	540 RPM		
Gearbox Rating *	40	60	60	60	75	75
Deck	10 ga	10 ga	10 ga	10 ga	10 ga	10 ga
Deck Height	7"	7"	7"	7"	7"	7"
Skirt Thickness	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"
Stump Jumper	Yes (Round)	Yes (Round)	Yes (Round)	Yes (Round)		
Rubber Guard	Std.	Std.	Std.	Std.	Std.	Std.
Protection	Shear Pin	Shear Pin	Shear Pin	Shear Pin	Slip Clutch	Slip Clutch
List Price (Shear Pin)	MKRC748 \$3,215.00	MKRC760 \$3,655.00	MKRC766 \$4,060.00	MKRC772 \$4,610.00	N/A	N/A
List Price (Slip Clutch)	MKRC748SC \$3,465.00	MKRC760SC \$3,975.00	MKRC766SC \$4,375.00	MKRC772SC \$4,675.00	\$4,875.00	\$7,505.00

* Based on field performance



Chain Guards *Includes both front and back chains.*

Part # (Chain)	List Price
PRC48CHAIN16	\$480.00
PRC60CHAIN16	\$555.00
PRC66CHAIN16	\$635.00
PRC72CHAIN16	\$715.00
PRC84CHAIN16	\$810.00

Slip Clutch

Part #	Description	List Price
PRCSC	Optional Light Duty Slip Clutch	\$475.00

3PH Rotary Cutters Plus



FEATURES

- Maximum brush diameter 2
- 7 year limited warrant
- Cat. 1 & Cat. 2 3P
- Draw bar hitch (PRCPLUS120)
- Adjustable cutting height 2" – 10"
- Floating top link maintains cutting height
- Solid segmented wheel
(PRCPLUS60 - PRCPLUS96 & PRCPLUS120-3PH)
- Pneumatic wheels (PRCPLUS120)
- 3 blade design with stump jumper
- Standard front and rear rubber guard
- Deck protection rin
- Slip clutch to protect the drive line
- Bolt on skid shoe

OPTIONS

- Chain curtain



Blade Assembly



Floating Top Link



Segmented Wheel



Slip Clutch



SPECIFICATIONS

Model	PRCPLUS60	PRCPLUS72	PRCPLUS84	PRCPLUS96	PRCPLUS120	PRCPLUS120-3PH
Shipping Weight (LBS.)	595	775	1045	1530	2320	2045
Hitch Type	Cat. 1 & 2 Quick Tach compatible				Draw Bar Hitch	Cat. 2
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	60"	72"	84"	96"	120"	120"
Max Brush Diameter	2"	2"	2"	2"	2"	2"
Tip Speed (Ft/Min)	12,462	15,260	17,803	16,500	14,500	14,500
Wheel Type (Qty.)	16" Segmented (1)	16" Segmented (1)	16" Segmented (2)	16" Segmented (2)	16" Pneumatic (2)	16" Segmented (2)
Blades	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	6 - 1/2" x 4"	6 - 1/2" x 4"
Tractor HP (min)	30-40	60	60	80	80	80
PTO RPM	540	540	540	540	540	540
Gearbox Rating *	75 HP	75 HP	90 HP	100 HP	120 HP	120 HP
Deck	3/16"	3/16"	3/16"	3/16"	9GA	9GA
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes
Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
List Price	\$4,695.00	\$5,725.00	\$8,050.00	\$11,515.00	\$18,775.00	\$15,390.00

* Based on field performance



CHAIN GUARDS *Includes both front and back chains.*

Part # (Chain)	List Price
PRC60CHAIN16	\$555.00
PRC72CHAIN16	\$715.00
PRC84CHAIN16	\$810.00
PRC96CHAIN16	\$950.00
PRC120CHAIN	\$1,215.00

DRAW BAR KIT

For 84" & 96" models. Kit consists of components shown in black in this image; red components for illustration only.

Part #	List Price
PRCDB84-96	\$3,395.00



Rotary Cutters - Wing



FEATURES

- 15 dual wing rotary cutter
- 4 heavy duty gearboxes, each covered with 7 year limited warranty
- Transport lock for each wing
- 1.5" diameter cutting capacity
- Each wing can float to conform to ground contour



**STRAIGHT
AXLE MODEL**



**WALKING
TANDEM
AXLE MODEL**

SPECIFICATIONS

Model	PW180
Shipping Weight (LBS.)	4,400
3PH Mount	Draw Bar Hitch
Cutting Height	3" -15"
Cutting Path	180"
Max Brush Diameter	1.5"
Overall Width (Wings Down)	184"
Folded Width (Wings Up)	78"
Tip Speed (Ft/Min)	15,100 ft/min on Wings 14,850 ft/min on center
Wheels (Pneumatic)	21"
Blades	9 blades 1/2"x4"
Tractor HP (min)	75HP
PTO RPM	540
Gearbox Rating (Wing)	140 HP
Gearbox Rating (Center)	105 HP
Gearbox Rating (Divider)	87 HP
Deck	3/16"
Stump Jumper	Yes
Protection	Independent Slip Clutch on Each Spindle
Wing Float Range(degrees)	20 down and 33 up

Model	Description	List Price
PW180SP	Straight Axle with 6 Pneumatic Tires	\$41,945.00
PW180SS	Straight Axle with 6 Solid Tires	\$43,555.00
PW180TP	Walking Tandem Axle with 8 Pneumatic Tires	\$43,480.00
PW180TS	Walking Tandem Axle with 8 Solid Tires	\$45,990.00





DIRECT MOUNTED MOTOR

The hydraulic radial piston direct mounted motor and heavy duty bearing assembly deliver tip speeds of up to 20,000 ft. per minute and produce powerful torque at lower speeds for continuous cutting and faster recovery.

(A)



(B)



REVERSIBLE FRONT PUSH BAR

One side (A) has aggressive teeth for accurate pushing and directional control of larger trees. The reverse side (B) is smooth, intended for flattening dense underbrush.



HEAVY DUTY 10" CUT CAPACITY

Easily power through dense brush, woody vegetation even 10 inch diameter trees across fields, forests and trails.



4 REPLACEABLE FLAIL KNIVES

Mounted on the rotor are 4 replaceable pivoting flail knives designed to deliver maximum centrifugal velocity and shear force on every rotation.



HEAVY DUTY 1" THICK ROTOR

78" diameter oversized rotor is manufactured using a 1" thick steel plate.

EXTREME DUTY

BRUSH CUTTER



FEATURES

- 78" Brush Cutter - Skid Steer attachment
- 86.5" Machine Width
- 10" cut capacity
- Radial Piston Motor (4 pkgs up to 40GPM)
 - Recommend 20
 - High Torque capability at low speeds
 - Up to 4000psi operating pressure
- Heavy duty 1" cutting bar; 4 cutting blades
 - Optional bolt-on insert
- Tip speed of 20,000 ft/min
- 1/4" deck thickness
- Replaceable skid shoe
- 2200 LBS approximate weight
- Reversible push bar (trees/brush/grass)
- **7 year limited consumer warranty**
1 year limited commercial warranty



OPTIONAL BOLT-ON MULCHING KNIVES

Bolt-on mulching knives go on the bottom of the rotor to effortlessly mulch through stumps and logs.



OPTIONAL CARBIDE CHIPPER KNIVES

Another option for mulching stumps and logs are the optional carbide tipped mulching knives.

SPECIFICATIONS

Model	BCH78XD
Description	78" Brush Cutter
Machine Width	86.5"
Cutting Path	78"
Max Brush Diameter	10"
Radial Piston Motor	4 pkgs up to 40GPM
Recommended GPM	20+GPM
Torque	Higher Torque capability at low speeds
Operating Pressure	Up to 4000 psi
Blades	4 blades
Heavy Duty Cutting Bar	1"
Tip Speed	20,000 ft/min
Deck Thickness	1/4"
Shipping Weight (LBS.)	2,200
List Price	\$20,105.00

OPTIONS

Part #	List Price
BCH78XD-BK - BOLT ON MULCHING KNIFE KIT	\$1,085.00
BCH78XD-MK - CARBIDE TIP CHIPPER KNIFE KIT	\$755.00

MOTOR OPTIONS

Part #
A - 14-20GPM
B - 20-26 GPM
C - 26-33 GPM
D - 33-40 GPM



Finishing Mowers



Pictured: Rear Discharge Model

FEATURES

- 7 year limited warranty
- Cat. 1 hitc
- 4 solid rubber tire
- Floating end lin
- Taper lock pulleys
- Solid scalp rolle

SPECIFICATIONS

Model	PFM48RD	PFM60RD	PFM72RD	PFM90RD
Cutting Width	48"	60"	72"	90"
Overall Width	50"	62"	74"	93"
Weight (LBS.)	370	435	525	714
Acres/Hr@5 MPH	2.43	3.03	3.63	4.57
HP Required	14/20	20/25	25/30	30/40
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1
RPM @ PTO Shaft	540	540	540	540
Number of Blades	3	3	3	5
Tip Speed (Ft/Min)	15,660	18,000	16,850	16,288
Wheels	Solid Rubber Wheel	Solid Rubber Wheel	Solid Rubber Wheel	Solid
Deck Thickness	10 GA	10 GA	3/16"	3/16"
Cutting Height	2" - 5"	2" - 5"	2" - 5"	2" - 5"
List Price	\$4,810.00	\$5,505.00	\$6,275.00	\$7,925.00

