

# STUMP GRINDER

3PH PTO Driven Hydraulic Swing

Prices Effective as of 3-25

## R25PS HYDRAULIC SWING FEATURES

- Quick hitch compatible
- Category I & II compatible
- Slip clutch protection
- 700 Series WearSharp® carbide teeth
- Greaseable pins
- One way cutting
- Extended frame for stable footing
- Durable HDPE deflector for help contain debris
- Depth/lift gauge



### R25PSS

- Requires 2 remotes



### R25PSV

- STGV valve included
- Only requires 1 remote

Stump Grinder	R25PSS	R25PSV
Recommended HP	25-80 HP	
PTO Speed (input)	540 RPM	
Rotor Size	25"	
Tooth Construction	CARBIDE BOLT INTO POCKET	
Number of Teeth	18	
Cutting Wheel Speed	1,026 RPM	
Cutting Height (above grade)	20"	
Cutting Height (below grade)	6"	
Cutting Depth (per pass)	2.25"	
Cutting Width (per pass)	22"	
Swing Arc	55°	
Protection	SLIP CLUTCH	
Hitch	CAT I & II	
Quick Hitch Compatible	YES	
Required Remotes	2	1
Length	42"	
Width	72"	
Unit Weight (lbs)	885 LBS.	920 LBS.
Base Unit	<b>\$7,960</b>	<b>\$9,075</b>

Options	Part Number	Price
R25PS Valve (incl. hoses)	STGV	<b>\$1,620</b>
Debris Screen 10'x5' (4 posts)	DS510	<b>\$550</b>

Wear Parts	Part Number	Price
WearSharp® Tooth	700-WS	<b>\$26</b>
Nut for tooth	500-NUT	<b>\$1.75</b>
Spacer	700-SPACER	<b>\$2</b>
25 pc. Kit	700-WS25KIT	<b>\$560</b>
100 pc. Kit	700-WS100KIT	<b>\$1,900</b>



## R25PS VALVE

- Required for tractors with one remote
- Mounted on ergonomic adjustable arm
- Includes hoses



## DEBRIS SCREEN

- Used in areas where debris from the stump grinder needs to be contained
- 10' wide by 5' high 9 oz 1000D woven PVC coated polyester
- Includes 4 posts with integrated ground spike



## WEARSHARP® TOOTH

- Carbide tip
- Indexable 3 times for extended use



# STUMP GRINDER

3PH PTO Direct Drive

Prices Effective as of 3-25

## R25PD DIRECT DRIVE FEATURES

- Quick hitch compatible
- Category I & II compatible
- Slip clutch protection
- 700 Series WearSharp® carbide teeth
- One way cutting
- Park stand



R25PD

Stump Grinder	R25PD
Recommended HP	20-45
PTO Speed (input)	540 RPM
Rotor Size	25"
Tooth Construction	CARBIDE BOLT INTO POCKET
Number of Teeth	18
Cutting Wheel Speed	540 RPM
Cutting Height (above grade)	10"
Cutting Height (below grade)	7"
Cutting Depth (per pass)	2.25"
Cutting Width (per pass)	22"
Protection	SLIP CLUTCH
Hitch	CAT I
Quick Hitch Compatible	YES
Length	37"
Width	45"
Unit Weight (lbs)	425 LBS.
Base Unit	\$3,820

Options	Part Number	Price
Extensions	132369	\$300
Debris Screen 10'x5' (4 posts)	DS510	\$550

Wear Parts	Part Number	Price
WearSharp® Tooth	700-WS	\$26
Nut for tooth	500-NUT	\$1.75
Spacer	700-SPACER	\$2
25 pc. Kit	700-WS25KIT	\$560
100 pc. Kit	700-WS100KIT	\$1,900



## EXTENSIONS

- Hitch extensions



## DEBRIS SCREEN

- Used in areas where debris from the stump grinder needs to be contained
- 10' wide by 5' high 9 oz 1000D woven PVC coated polyester
- Includes 4 posts with integrated ground spike



## WEARSHARP® TOOTH

- Carbide tip
- Indexable 3 times for extended use



# STUMP GRINDER

Hydraulic Direct Drive - Compact

Prices Effective as of 3-25

## HYDRAULIC DIRECT DRIVE FEATURES

- 18" Rotor
- 1/2" Thick rotor
- 700 Series WearSharp© carbide teeth
- 10 Teeth
- 2.25" Cutting Depth Max. (per pass)
- 1 Hydraulic Remote Required
- Optional Hose protector shield available



R18HD

Model	R18HDMB1015G	R18HDMS1015G	R18HDSK1520G
Rotor dia		18"	
Style		DIRECT	
Number of Teeth		10	
Cutting Wheel Speed		1450-2180 RPM	
Cutting Depth (below grade)		4.5"	
Weight (shipping)		240 LBS.	
Dimensions - L x W (shipping)		37" X 36"	
Hitch Type	MINI BOBCAT	MINI SKID STEER	UNIVERSAL SKID STEER
Motor	26CC GEAR MOTOR	26CC GEAR MOTOR	39CC GEAR MOTOR
GPM	10 TO 15	10 TO 15	15 TO 20
Base Unit	\$4,040	\$3,900	\$4,200

Options	Part Number	Price
Hose Protector Shield	134770-AA	\$130
Debris Screen 10'x5' (4 posts)	DS510	\$550



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# STUMP GRINDER

Hydraulic Direct Drive

Prices Effective as of 3-25

## HYDRAULIC DRIVE FEATURES

- 25" Rotor
- 3/4" Thick rotor
- 700 Series WearSharp® carbide teeth
- 18 Teeth
- 2.25" Cutting Depth Max. (per pass)
- 1 Hydraulic Remote Required
- Optional Hose protector shield available



R25HD

Model	R25HDSK1620G	R25HDSK2026G	R25HDSK2738P
Rotor dia		25"	
Style		DIRECT	
Number of Teeth		18	
Cutting Wheel Speed		1135-1590 RPM	
Cutting Depth (below grade)		7"	
Weight (shipping)		480-500 LBS.	
Dimensions - L x W (shipping)		41" X 47"	
Hitch Type		UNIVERSAL SKID STEER	
Motor	50CC GEAR MOTOR	63CC GEAR MOTOR	90CC BENT AXIS PISTON MOTOR
GPM	16 TO 20	20 TO 26	27 TO 38
Base Unit	\$6,000	\$6,400	\$7,480

Options	Part Number	Price
Hose Protector Shield	134771-AA	\$140
Debris Screen 10'x5' (4 posts)	DS510	\$550



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# STUMP GRINDER

## Hydraulic Drive Swing

Prices Effective as of 3-25

### HYDRAULIC DRIVE SWING FEATURES

- 25" Rotor
- 3/4" Thick rotor
- 700 Series WearSharp© carbide teeth
- 18 Teeth
- 2.25" Cutting Depth Max. (per pass)
- 1 Hydraulic Remote Required
- 41" of travel
- Adjustable stabilizing feet
- Optional Hose protector shield available



Model	R25HSSK1620G	R25HSSK2026G	R25HSSK2738P
Rotor dia		25"	
Style		SWING	
Number of Teeth		18	
Cutting Wheel Speed		1135-1590 RPM	
Cutting Depth (below grade)		7"	
Weight (shipping)		670 LBS.	
Dimensions - L x W (shipping)		83" X 47"	
Hitch Type		UNIVERSAL SKID STEER	
Motor	50CC GEAR MOTOR	63CC GEAR MOTOR	90CC BENT AXIS PISTON MOTOR
GPM	16 TO 20	20 TO 26	27 TO 38
Base Unit	\$8,900	\$9,000	\$10,610

Options	Part Number	Price
Hose Protector Shield	134780-AA	\$145
Bi-Directional Wheel	134868-AA	\$600
Debris Screen 10'x5' (4 posts)	DS510	\$550



## WEARSHARP<sup>®</sup> TOOTH

- Carbide tip
- Indexable 3 times for extended use




## R18HD HOSE PROTECTOR SHIELD

- Hose protector shield
- Optional shield increases protection to hose and motor assembly.



## R25HS HOSE PROTECTOR SHIELD

- Hose protector shield
- Optional shield increases protection to hose and motor assembly.

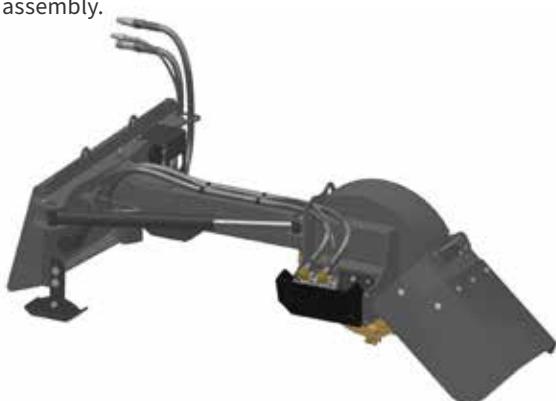

## DEBRIS SCREEN

- Used in areas where debris from the stump grinder needs to be contained
- 10' wide by 5' high 9 oz 1000D woven PVC coated polyester
- Includes 4 posts with integrated ground spike



## R25HD HOSE PROTECTOR SHIELD

- Hose protector shield
- Optional shield increases protection to hose and motor assembly.

